


DT-5K-NI-USB

DATE	CHANGES	INTL	REV
08.29.11	Original		1.00

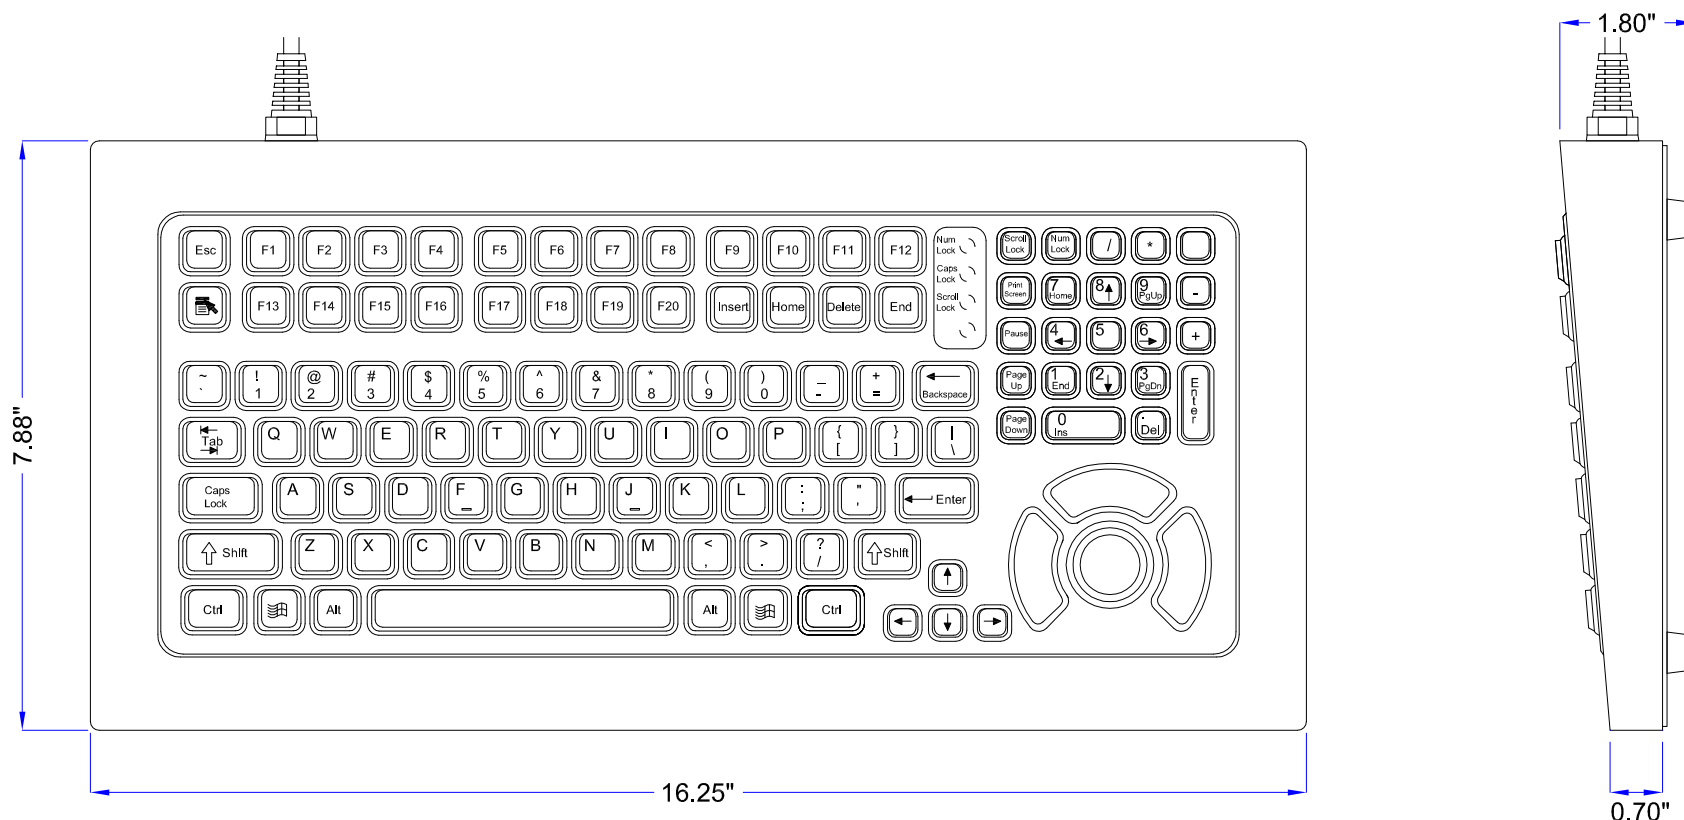

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2 or AT/Serial:
 KEYBOARD: 50mA@5V (from Keyboard port)
 POINTER: 35mA@5V (from Mouse port)
 USB: 85mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

5.25 lbs +/- 0.10 lbs (2.38 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.5



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2011 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-9530

Part Number: DT-5K-NI-USB

Drawing Title: DT-5K-NI-USB-MKT

Drawing Number: MKT0272

Revision: 1.00

Sheet: 1 OF 1

Date: 08.29.11

TWH